


Inquiry form
for U-ONE(-SAFETY)-LWL

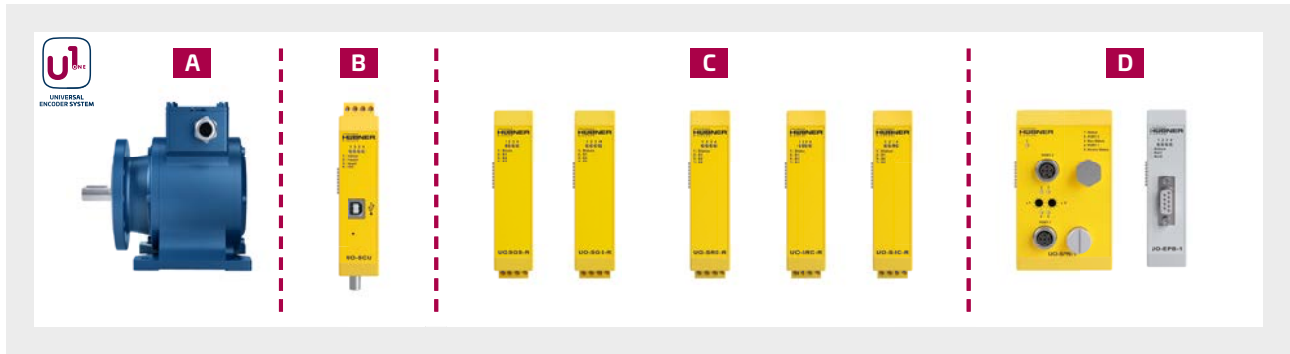

Sender			
Company:		Contact partner:	
		Phone:	
Address:		Fax:	
		E-mail:	

1 Field of application / application:
.....

2 Number of items:
.....

3 Date when required / delivery date:
.....

4 Certification:
 SIL 2/PL d without SIL/PL

A Basic unit

5 Design type:

B5 (flange) Shaft – drive end:
with feather key: Ø 11 mm Ø 14 mm

Hollow shaft
with feather keyway: Ø 20 mm

B35 (flange + foot) Shaft – drive end:
with feather key: Ø 11 mm Ø 14 mm

Through hollow shaft For add-on units
with feather keyway: Ø 20 mm

Electronic function modules

B Controller module incl. decoder

6 Additional analog and incremental output (not safety certified):

Yes No

C Input / output modules (max. 15 switches per system)

7 Speed switches:

Number: 0 1 2 3 4 5 6

8 Position switches:

Number: 0 1 2 3 4 5 6 7
 8 9 10 11 12 13 14 15

D Communication modules (max. 2 modules per system)

9 Bus interface PROFINET IO:

PROFIsafe protocol (SIL 2/PL d): 0 1 2

Standard protocol (without SIL/PL): 0 1 2

10 Bus interface PROFIBUS-DP:

PROFIsafe protocol (SIL 2/PL d): 0 1 2

Standard protocol (without SIL/PL): 0 1 2

11 Other requirements / miscellaneous:

.....

.....

.....